

# °online

The power of this light source lies in its slenderness and unobtrusiveness; the simplicity of the fixtures' design makes that it can be used anywhere. An innovative and state-of-the-art magnet and contact system makes that a wide variety of led-fixtures can be easily inserted or moved.

The led-fixtures are similar in style yet each one of them has its own character and lighting quality.

Eden Design was the first to introduce this magnet system on the market. First presentation was in **2010** on the designfair Interieur Kortrijk, Belgium.

This collection won several awards, such as:

- The Best of the Best Red Dot Award (2011)
- Design Plus powered by Light & Building (2012)
- Henri van de Velde Label (2010)

Design by Bart Lens



reddot design award  
best of the best 2011



DESIGN PLUS  
powered by: light+building



°turn

°in.small



°dot

°knick.small

°knick


°out

°in

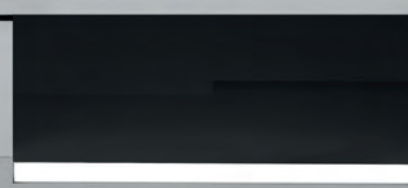



\*online / Grey Office, Greece - architects eDje - photograph by Vangelis Paterakis

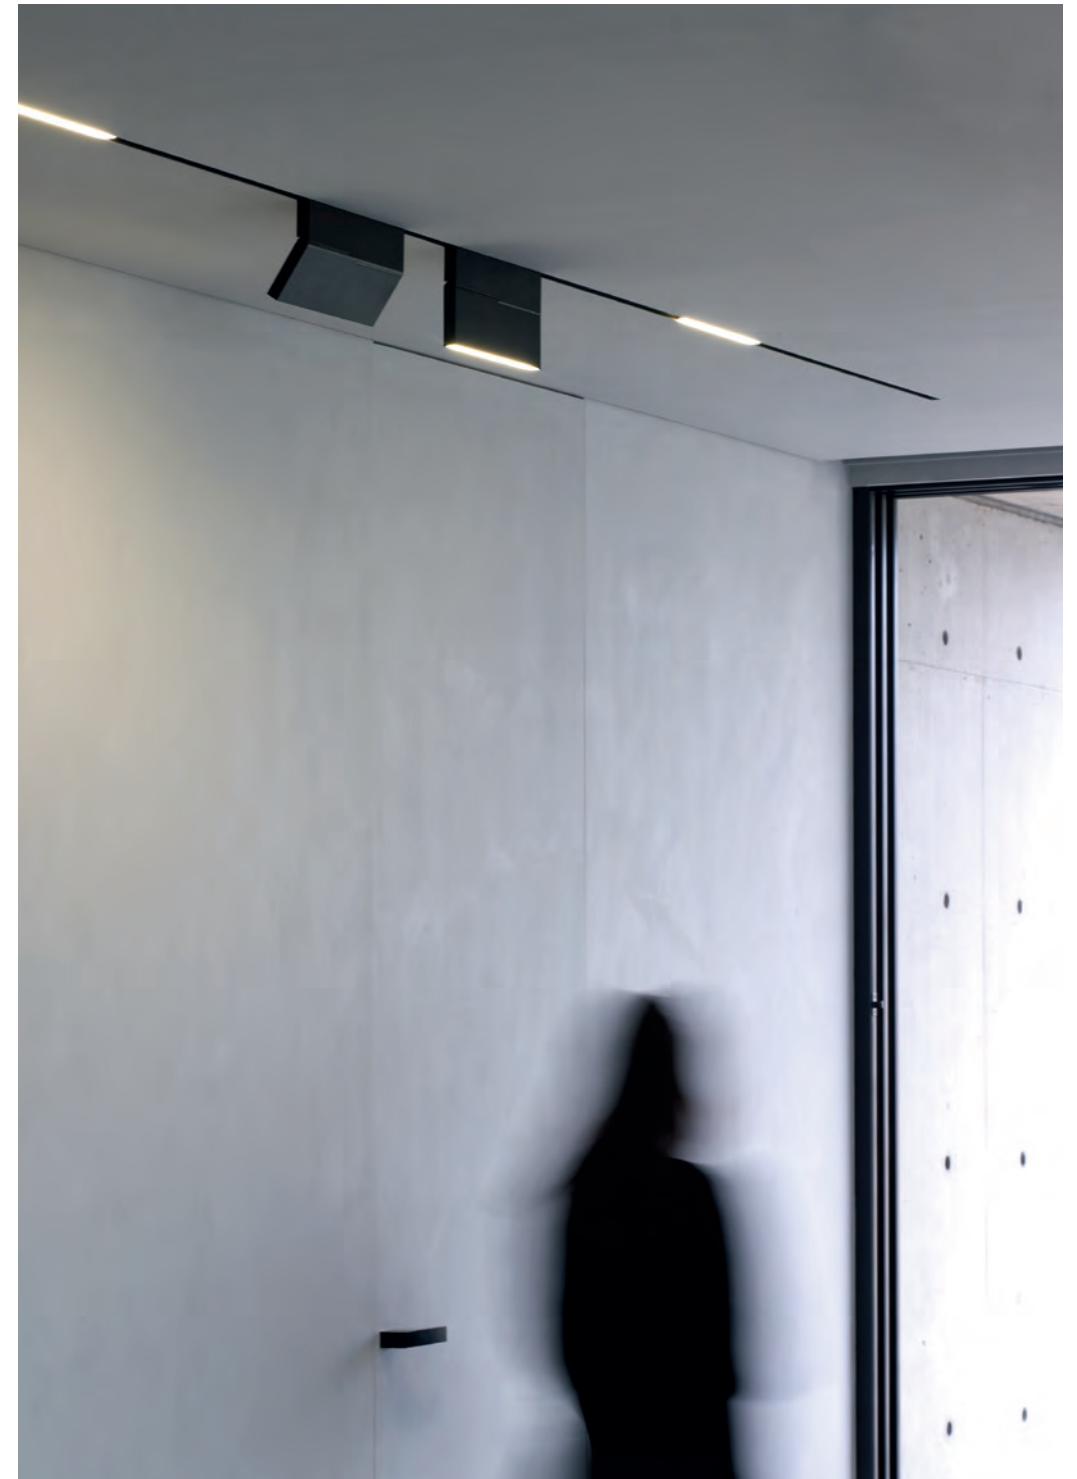


\*online / Grey Office, Greece- architects eDje - photograph by Vangelis Paterakis



NEW

°o-disk / general lighting

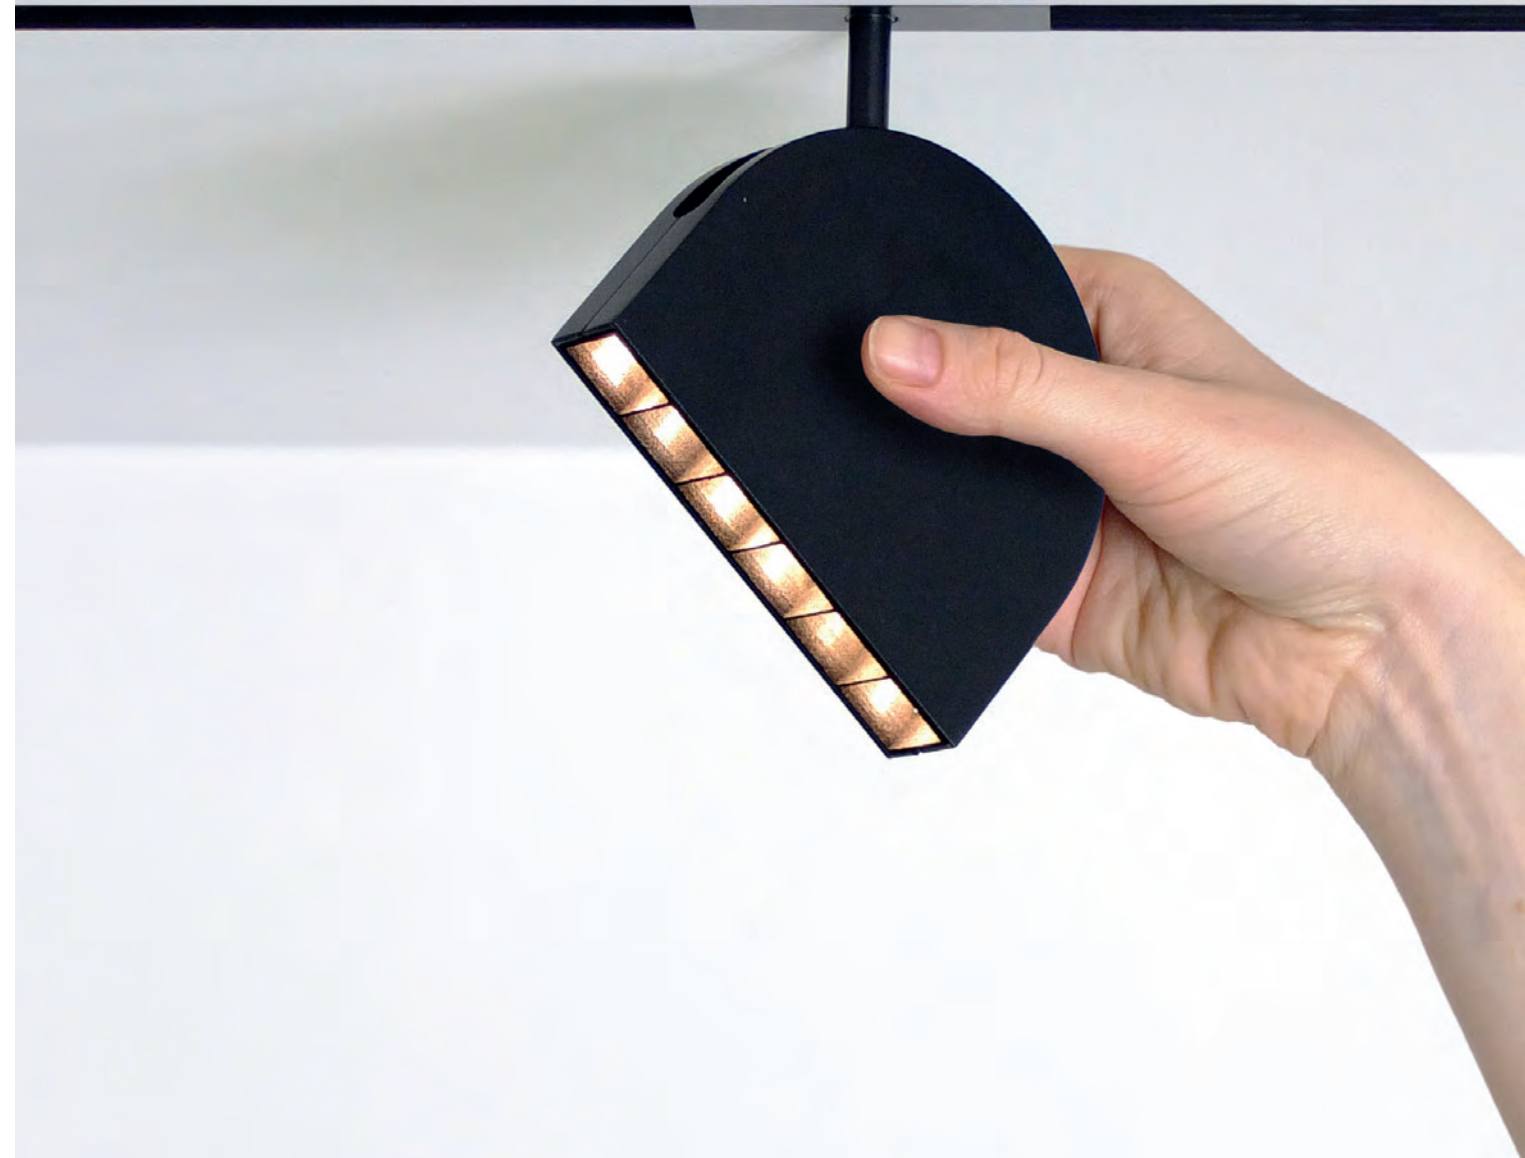

NEW

°u-disk / powerful spot




\*knick / Harbour Green, Hong Kong - architect Millimeter Interior Design Limited



\*turn / apartment, Israel - architect Pitsuo Kedem - ST-OR - lighting design Orly Avron - photograph by Amit Geron



°online / Villa V, Belgium - architect Francisca Hautekeete - photograph by Annick Vernimmen

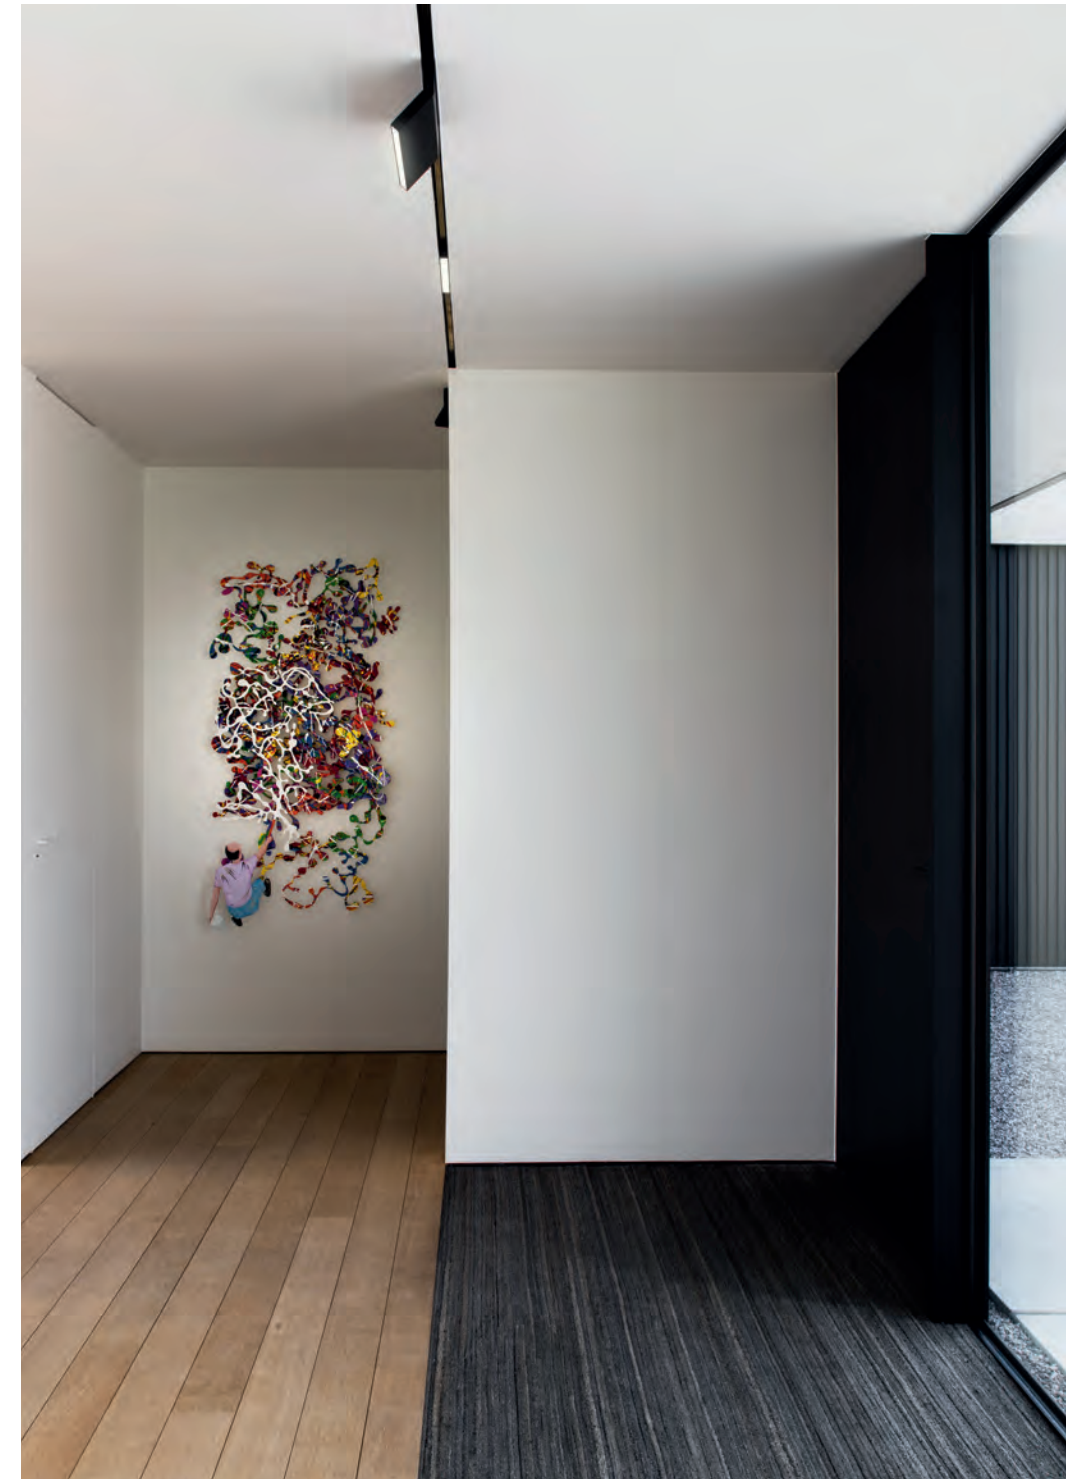

°online / Villa V, Belgium - architect Francisca Hautekeete - photograph by Annick Vernimmen



\*knick / Apartment, Paris - architect Angelo View Drive



\*turn / Villa, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)



\*knick.small & \*knick





\*knick / Penthouse, Ukraine - architect NOTT Design Studio (Sergey Gotvyansky, Mikhail Temnikov)



°out monopoint with plasterkit / Beach house Knokke - architect Glenn Reynaert - photograph by Hendrik Biegs



\*in monopoint with plasterkit



\*knick monopoint with plasterkit



° knick



°dot monopoint with plasterkit



°dot monopoint with plasterkit / Grey Perfection, Moscow - architect Dina Mezheva - photograph by Bogdan Vitkov



°turn monopoint with plasterkit & °knick / Grey Perfection, Moscow - architect Dina Mezheva - photograph by Bogdan Vitkov



\*turn / galerie Kamel Mennour, Paris - architect Pierre Yovanovitch - lighting design Dominique Liners (ETOILES)  
 photograph by Jean-François Jaussaud - Luxproductions




\*turn / galerie Kamel Mennour, Paris - architect Pierre Yovanovitch - lighting design Dominique Liners (ETOILES)  
 photograph by Jean-François Jaussaud - Luxproductions





\*knick / Industrial loft, Russia - architect Denis Krasikov, Cartelle Design

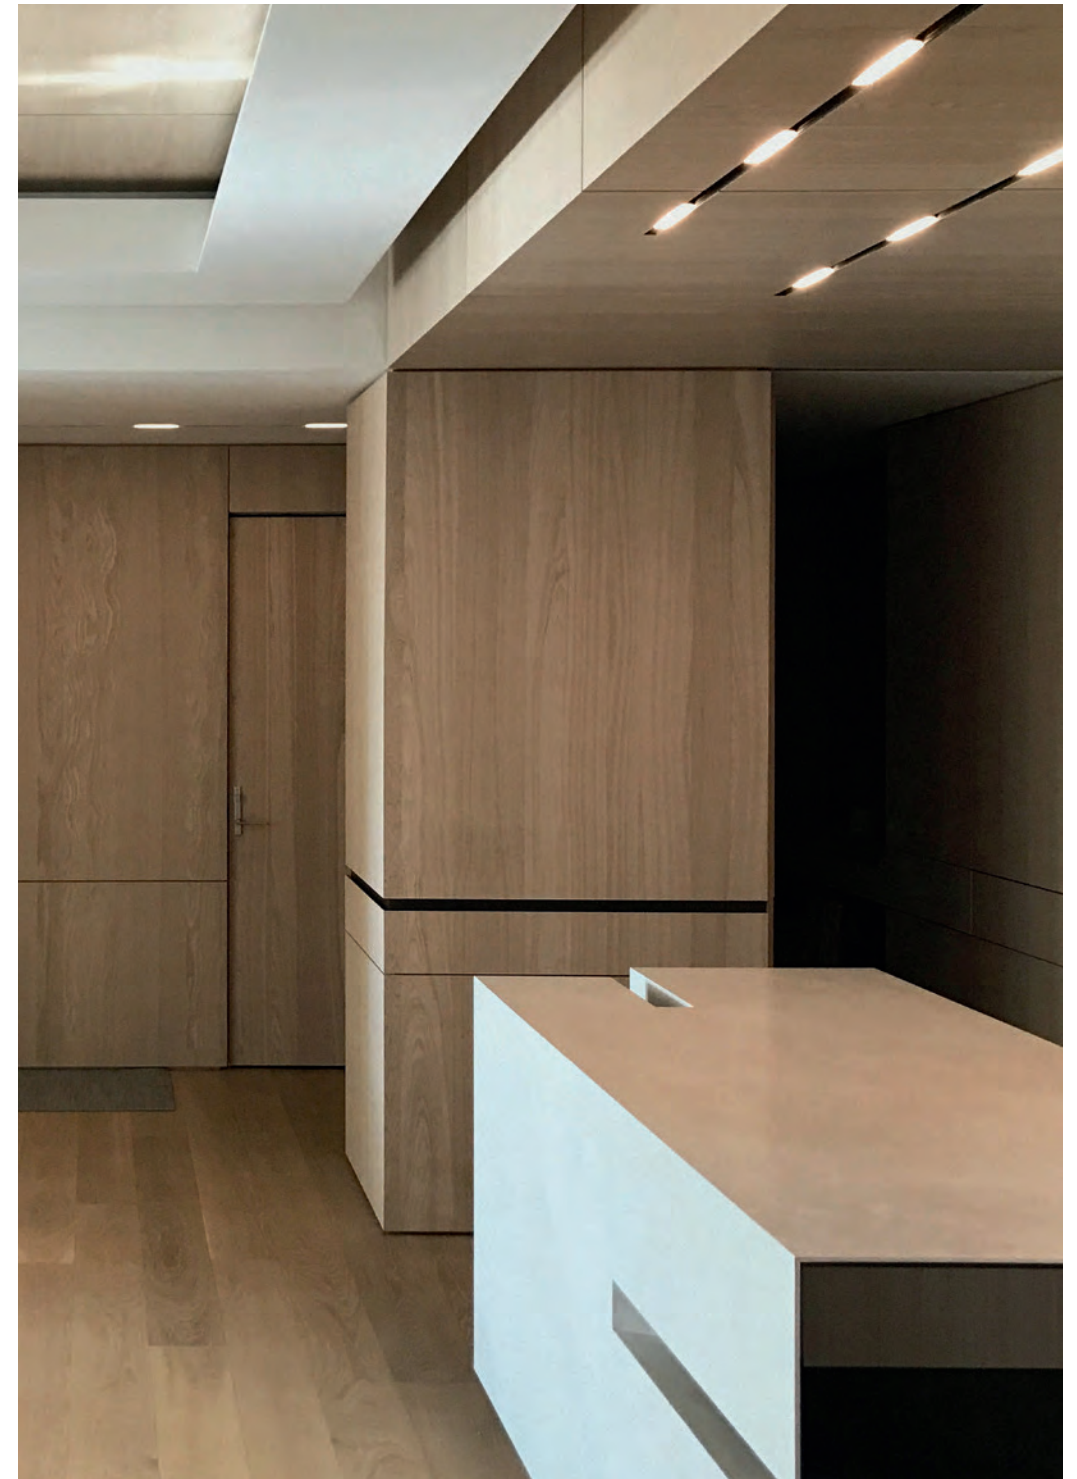

\*in / Regency NY - architect Workshop APD - custom building contractor Dutchman Contracting, Inc.



°out / Church Genk, Belgium - architect PCP Architects - photograph by Philippe van Gelooven




°online suspended track / Design Museum Gent, Belgium - photograph by Beeldpunt





\*knick / Men's Choice II, Slovakia - architects AT26 - photograph by Jakub Dvorak

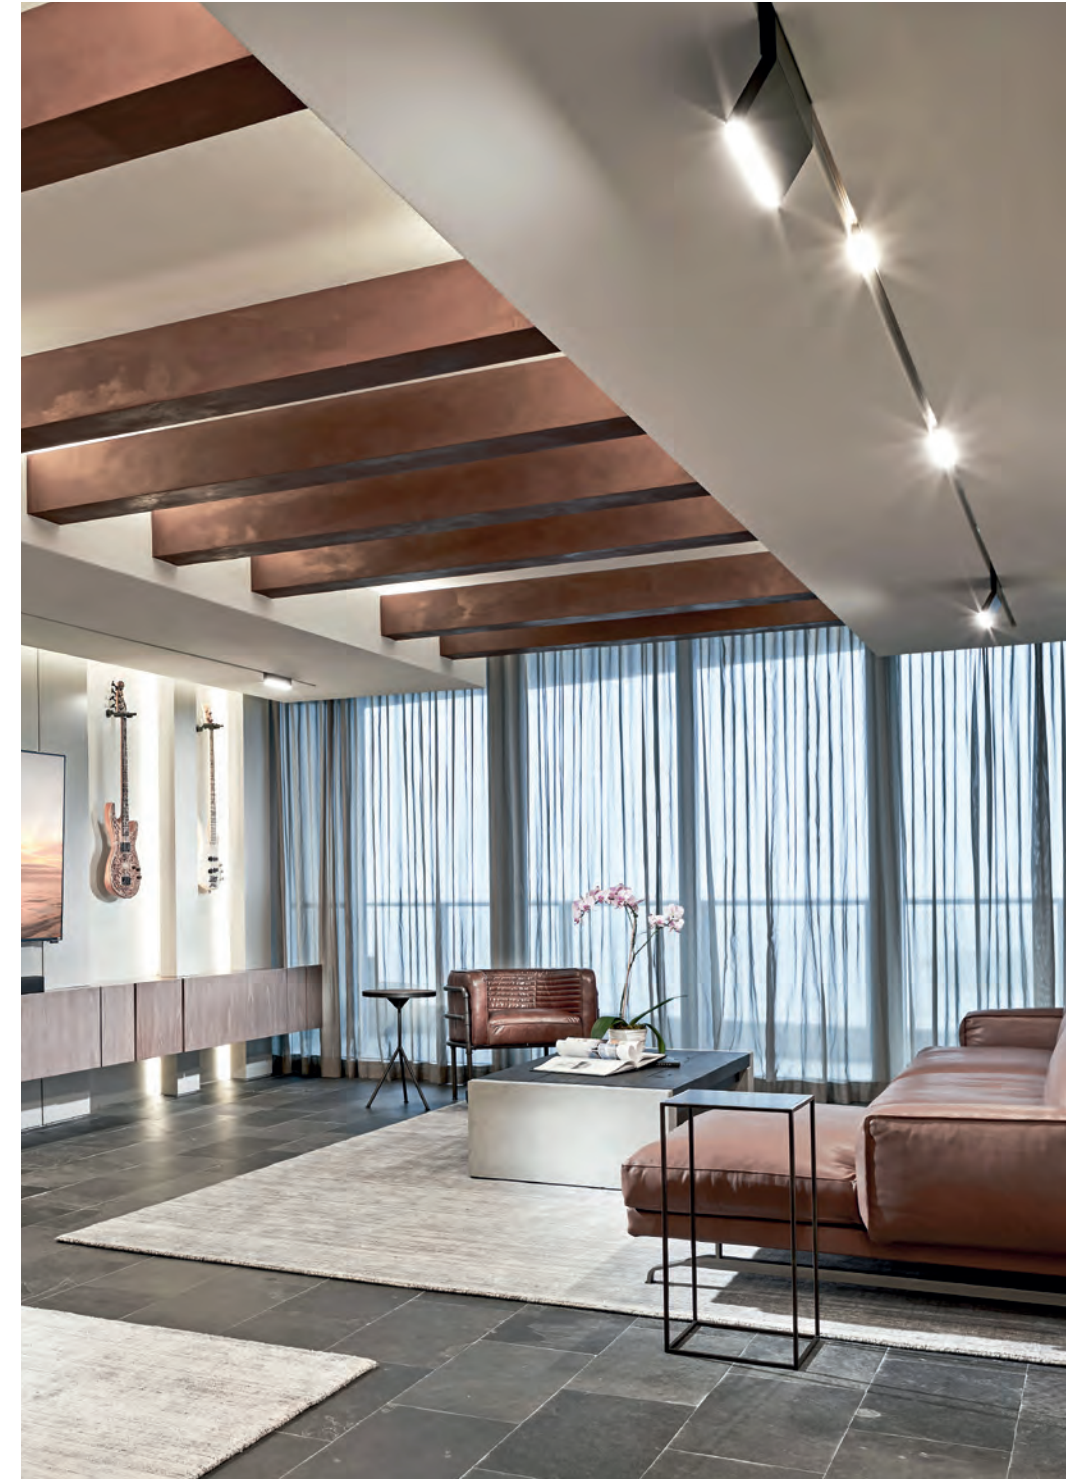

\*knick / Grosvenor House Coconut Grove, Miami - RS3 Design - Luxe Cable + Light





°online surface mounted / House, Belgium - architect Project B



°out / office, Australia

# line





material aluminium coated  
 weight 1,75 kg/lm - 1,16 lb/feet  
 voltage 24Vdc  
 max wattage 240W on single circuit  
 circuits 2  
 dimming 1-10V / 0-10V / Dali  
 certifications CE  EneC  
 classifications IP20 

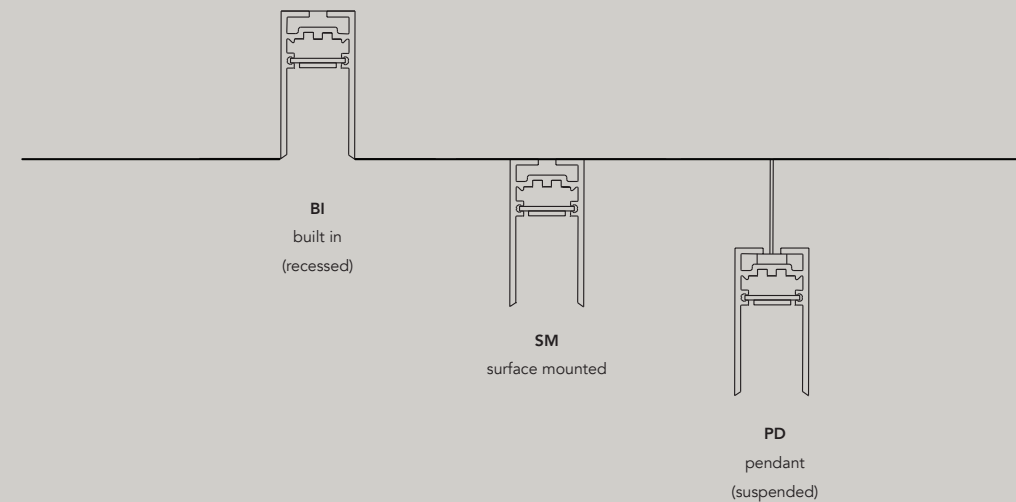







## L.L.C.T

Length	<b>4000</b> <b>300 - ...</b>	standard length in mm custom length in mm
Color body	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)
Type mounting	<b>BI</b> <b>SM</b> <b>PD</b>	built in (recessed) surface mount pendant (suspended / standard cable of 2m included)

Brackets

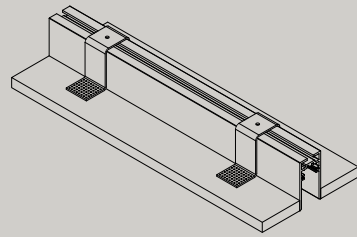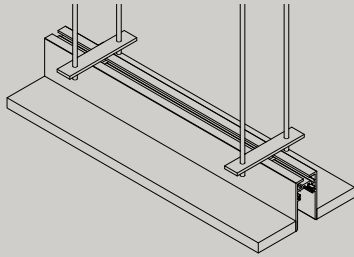

Connectors



Round Corner


End Cap

Pendant Extension Cable

L.CORN.RND.WH  
L.CORN.RND.BK

L.EC.WH  
L.EC.BK  
L.EC.AL

PD.EC.8M




L.CP.L.C

Cover profile


Length	<b>1000</b> <b>2000</b> <b>4000</b>	1000 mm - 39,37 in 2000 mm - 78,74 in 4000 mm - 157,48 in
--------	---	---

Color	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)
-------	-------------------------------------	---



power supply ceiling box (only for surface mounted version)


PSCB.BK	color black
PSCB.WH	color white

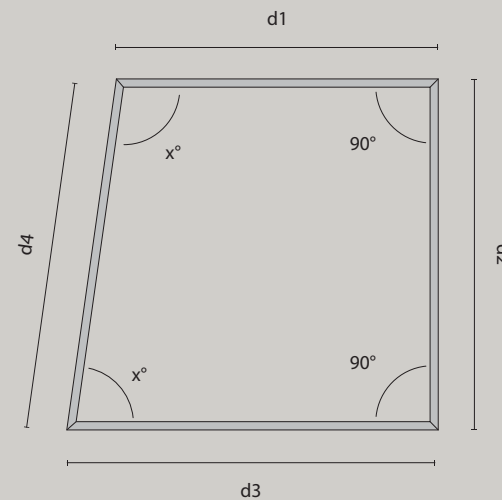

Mention the outside dimensions of the tracks and the inner corners

# °knick

material aluminium coated  
 weight 990gr / 2.18lb  
 voltage 24Vdc  
 cri >90  
 wattage 16,5W  
 dali supported (option)  
 DALI DT8, tunable white  
 inclination 90°  
 certifications CE, ENEC  
 classifications IP20

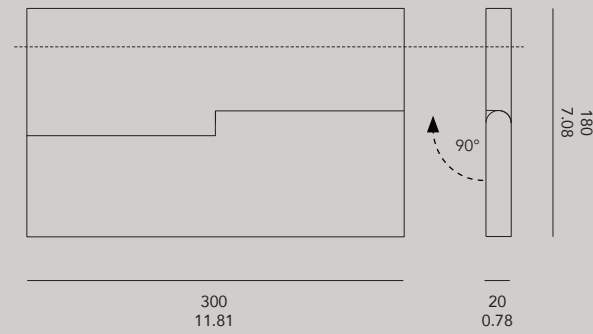


## KNICK.L.C.D.V.D

Led	<b>WW</b> <b>WW2</b> <b>NW2</b> <b>TW</b>	2700K   16,5W 3000K   16,5W 4000K   16,5W tunable white (only with IC)   18W   2200-6500°K	
Color body	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)	
Diffuser	<b>FI</b>  <b>MP</b>	frosted ice diffuser (wide beam)  microprism diffuser (wide beam & anti-glare)	WW 1100 lm / 490 cd WW2 1100 lm / 490 cd NW2 1100 lm / 490 cd TW WW 1100 lm / 600 cd WW2 1100 lm / 600 cd NW2 1100 lm / 600 cd TW
Version	<b>T</b> <b>BI</b>	track mount built in monopoint (plasterkit required)	
Dimming	<b>IC</b> <b>OC</b>	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)	
Accessories	<b>PL.300</b> <b>KNICK.FI</b> <b>KNICK.MP</b>	monopoint plasterkit 300 mm interchangeable frosted ice diffuser interchangeable microprism diffuser	

# °knick small


material aluminium coated  
 weight 350gr / 0.77lb  
 voltage 24Vdc  
 cri >90  
 wattage 9,6W  
 inclination 90°  
 dali supported (option) DT6  
 certifications CE, ENEC, ENEC  
 classifications IP20

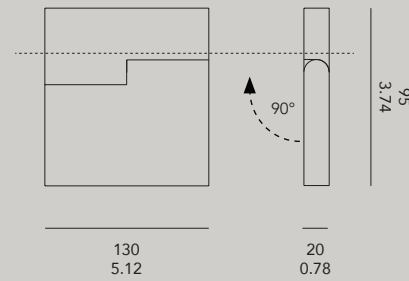

## KNICK.S.L.C.D.V.D

Led	<b>WW</b>	2700K   9,6W		
	<b>WW2</b>	3000K   9,6W		
	<b>NW2</b>	4000K   9,6W		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser (wide beam)	<b>WW</b>	1300 lm / 530 cd
			<b>WW2</b>	1300 lm / 530 cd
			<b>NW2</b>	1300 lm / 530 cd
	<b>MP</b>	microprism diffuser (wide beam & anti-glare)	<b>WW</b>	1300 lm / 600 cd
			<b>WW2</b>	1300 lm / 600 cd
			<b>NW2</b>	1300 lm / 600 cd
	<b>25</b>	optic 25°	<b>WW</b>	785 lm / 2940 cd
			<b>WW2</b>	825 lm / 3075 cd
			<b>NW2</b>	865 lm / 3150 cd
	<b>45</b>	optic 45°	<b>WW</b>	450 lm / 560 cd
			<b>WW2</b>	600 lm / 855 cd
			<b>NW2</b>	640 lm / 860 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT6		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.130</b>	monopoint plasterkit 130 mm		

material aluminium coated  
 weight 260gr / 0.57lb  
 voltage 24Vdc  
 cri >90  
 wattage 16,5W  
 dali supported (option) DALI DT8, tunable white  
 certifications CE, ENEC  
 classifications IP20

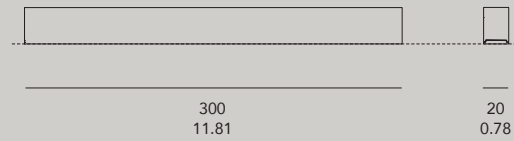


### IN.L.C.D.V.D

Led	<b>WW</b>	2700K   16,5W		
	<b>WW2</b>	3000K   16,5W		
	<b>NW2</b>	4000K   16,5W		
	<b>TW</b>	tunable white (only with IC)   18W   2200-6500°K		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser	WW	1300 lm / 530 cd
		(wide beam)	WW2	1300 lm / 530 cd
			NW2	1300 lm / 530 cd
			TW	
	<b>MP</b>	microprism diffuser	WW	1300 lm / 600 cd
		(wide beam & anti-glare)	WW2	1300 lm / 600 cd
			NW2	1300 lm / 600 cd
			TW	
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT8		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.300</b>	monopoint plasterkit 300 mm		
	<b>IN.FI</b>	interchangeable frosted ice diffuser		
	<b>IN.MP</b>	interchangeable microprism diffuser		

# °in small

material aluminium coated  
 weight 140gr / 0.31lb  
 voltage 24Vdc  
 cri >90  
 wattage 10W  
 dali supported (option) DT8  
 certifications CE    
 classifications IP20 




## IN.S.L.C.D.V.D

Led	<b>WW</b>	2700K   10W		
	<b>WW2</b>	3000K   10W		
	<b>NW2</b>	4000K   10W		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser (wide beam)	WW	485 lm / 180 cd
			WW2	510 lm / 190 cd
			NW2	535 lm / 200 cd
	<b>MP</b>	microprism diffuser (wide beam & anti-glare)	WW	485 lm / 180 cd
			WW2	510 lm / 190 cd
			NW2	535 lm / 200 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
	<b>OC</b>			
Accessories	<b>PL.150</b>	monopoint plasterkit 150 mm		
	<b>IN.S.FI</b>	interchangeable frosted ice diffuser		
	<b>IN.S.MP</b>	interchangeable microprism diffuser		

# turn

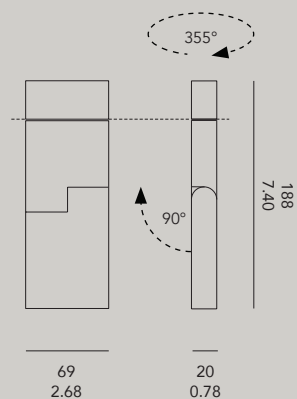

material aluminium coated  
 weight 380gr / 0,83lb  
 voltage 24Vdc  
 cri >90  
 wattage 9,6W  
 dali supported (option) DT6  
 rotation 355°  
 inclination 90°  
 certifications CE, ENEC  
 classifications IP20




## TURN.L.C.B.V.D

<b>Led</b>	<b>WW</b> <b>WW2</b> <b>NW2</b>	2700K   9,6W 3000K   9,6W 4000K   9,6W
<b>Color body</b>	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)
<b>Beam</b>	<b>FI</b>  <b>MP</b>  <b>25</b>  <b>40</b>	frosted ice diffuser (wide beam) microprism diffuser (wide beam & anti-glare) optic 25° optic 40°
		WW 750 lm / 2700 cd WW2 790 lm / 2820 cd NW2 830 lm / 2900 cd WW 680 lm / 1100 cd WW2 735 lm / 1665 cd NW2 770 lm / 1765 cd WW 485 lm / 180 cd WW2 510 lm / 190 cd NW2 535 lm / 200 cd WW 485 lm / 180 cd WW2 510 lm / 190 cd NW2 535 lm / 200 cd
<b>Version</b>	<b>T</b> <b>BI</b>	track mount built in monopoint (plasterkit required)
<b>Dimming</b>	<b>IC</b> <b>OC</b>	fixtures individually dimmable, controlled by DALI DT6 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)
<b>Accessories</b>	<b>PL.70</b> <b>TURN.25</b> <b>TURN.40</b> <b>TURN.FI</b> <b>TURN.MP</b>	monopoint plasterkit 70 mm interchangeable additional optics 25° interchangeable additional optics 40° interchangeable frosted ice diffuser interchangeable microprism diffuser

# °turn plus <sup>NEW</sup>

material aluminium coated / PC  
 weight 450gr/0,99lb  
 voltage 24Vdc  
 cri 92  
 wattage 13W  
 dali supported DT6 (option)  
 rotation 355°  
 inclination 90°  
 certifications CE   
 classifications IP20 

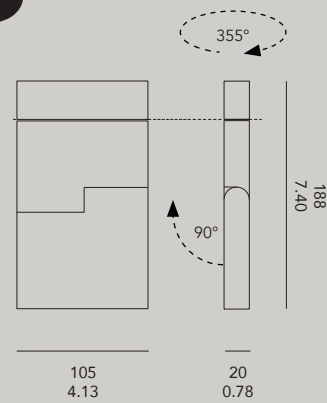


## TURN.PL.L.B.O.V.C

Led	<b>WW</b>	2700K   13W		
	<b>WW2</b>	3000K   13W		
	<b>NW2</b>	4000K   13W		
Body color	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Optics	<b>10</b>	optic 10°	WW	855 lm / 21400 cd
			WW2	940 lm / 23700 cd
			NW2	960 lm / 24750 cd
	<b>25</b>	optic 25°	WW	680 lm / 2580 cd
			WW2	720 lm / 2700 cd
			NW2	755 lm / 2835 cd
	<b>35</b>	optic 35°	WW	528 lm / 1540 cd
			WW2	690 lm / 1600 cd
			NW2	725 lm / 1680 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Control	<b>IC</b>	individually controlled fixture by DALI DT6		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.105</b>	monopoint plasterkit 105 mm		

# °turn sora

NEW


material aluminium coated  
 weight 380gr  
 voltage 24Vdc  
 cri 95  
 wattage 10 / 16W  
 dali supported (no 0-10V dimming, only DALI)  
 rotation 355°  
 inclination 90°  
 certifications CE  
 classifications IP20 

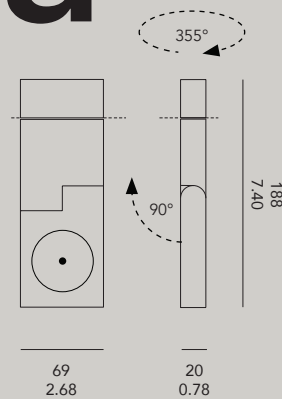

## TURN.SO.L.B.V.C


Led	<b>10-27</b>	10°, 2700K, SNAP compatible, max. 10W
	<b>10-30</b>	10°, 3000K, SNAP compatible, max. 10W
	<b>10-40</b>	10°, 4000K, SNAP compatible, max. 10W
	<b>15-27</b>	15°, 2700K, SNAP compatible, max. 16W
	<b>15-30</b>	15°, 3000K, SNAP compatible, max. 16W
	<b>15-40</b>	15°, 4000K, SNAP compatible, max. 16W
Body color	<b>BK</b>	black matt ral 9011
	<b>WH</b>	white matt ral 9016
	<b>AL</b>	aluminium color ral 9006 (on request only)
Version	<b>T</b>	track mount
	<b>BI</b>	built in monopoint (plasterkit required)
Control	<b>IC</b>	individually controlled fixture by DALI DT6
	<b>OC</b>	track overall controlled (if provided), no dimming possible
Accessories	<b>PL.70</b>	monopoint plasterkit 70 mm

# Snap system for turn soraa

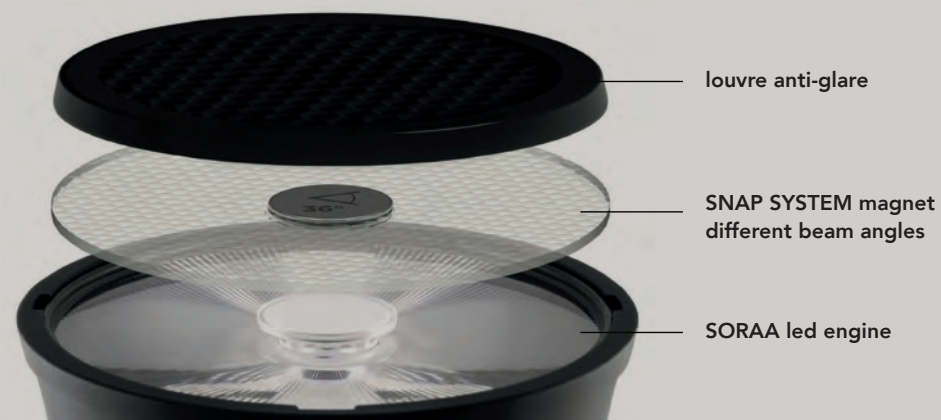


Soraa has developed an optical system that is optimized around its breakthrough GaN-on-GaN™ LED technology. The result is directional light with near perfect light distribution, exquisitely uniform color and smooth, artifact free transitions. The optical light engines deliver intensity normally associated with substantially larger diameter sources. Beam angles range from narrow spot to flood and can be combined with the SNAP System accessories to change light distribution and light color on site.

The SNAP SYSTEM's self-centering magnetic interconnect system makes using accessories completely user friendly. Simply attached the SNAP SYSTEM accessory directly to the led engine, the magnetic force from both the accessory and lamp will securely attached to one another and center itself. The accessories can be stacked in combination. For example, a beam spreader can be used in combination with CCT shifter.

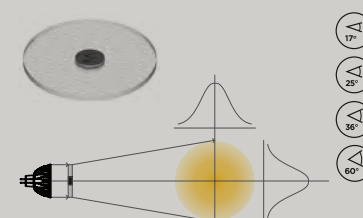


Use in any application where reducing the number of beam angle SKUs is required. Provides maximum flexibility up to the time of installation.

- TURN.SO.17** SNAP beam spreader 17°
- TURN.SO.25** SNAP beam spreader 25°
- TURN.SO.36** SNAP beam spreader 36°
- TURN.SO.60** SNAP beam spreader 60°

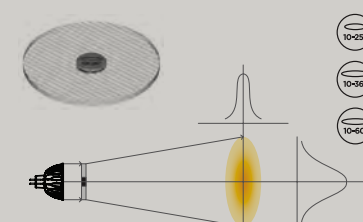


Use in wall washes and illuminating asymmetric objects. Reduces required number of light fixtures and spill.

- TURN.SO.1025** SNAP linear 10°x 25°
- TURN.SO.1036** SNAP linear 10°x 36°
- TURN.SO.1060** SNAP linear 10°x 60°

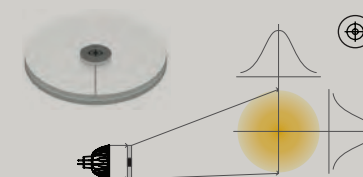


Designed with two lenses the AIM snap bends the beam from 0 degree to maximum deflection angle of 20 degrees, while maintaining uniform and consistent color and shape.

- TURN.SO.AIM** deflection angle of 20°

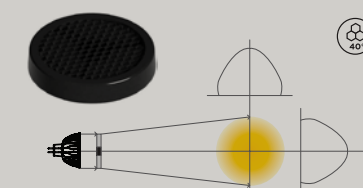

Eliminates high angle glare, making light beams disappear in downlight applications.

- TURN.SO.LOUVRE** SNAP anti-glare louvre

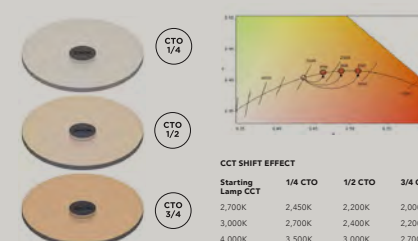


Use in hospitality and restaurant applications to simulate warm dimming. Create custom colors for festive occasions or brand identity.

- TURN.SO.CS.1/4** SNAP color shift small
- TURN.SO.CS.1/2** SNAP color shift medium
- TURN.SO.CS.3/4** SNAP color shift large

# °out

material aluminium coated  
 weight 450gr / 0.99lb  
 voltage 24Vdc  
 cri >90  
 wattage 16,5W  
 dali supported (option) DALI DT8, tunable white  
 certifications     
 classifications IP20 

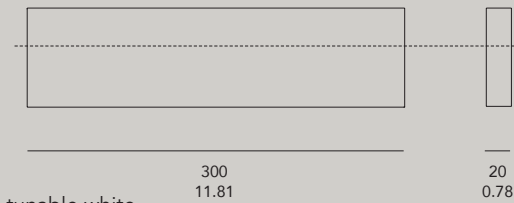

°out (FI)

## OUT.L.C.D.V.D

Led	<b>WW</b>	2700K   16,5W		
	<b>WW2</b>	3000K   16,5W		
	<b>NW2</b>	4000K   16,5W		
	<b>TW</b>	tunable white (only with IC)   18W   2200-6500°K		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	strip frosted ice	WW	1100 lm / 600 cd
			WW2	1100 lm / 600 cd
			NW2	1100 lm / 600 cd
			TW	
	<b>MP</b>	strip microprism (anti-glare)	WW	1100 lm / 600 cd
			WW2	1100 lm / 600 cd
			NW2	1100 lm / 600 cd
			TW	
	<b>SF</b>	solid frosted	WW	1100 lm / 275 cd
			WW2	1160 lm / 290 cd
			NW2	1220 lm / 305 cd
			TW	
<b>SC</b>	solid clear	WW	930 lm / 395 cd	
		WW2	980 lm / 415 cd	
		NW2	1030 lm / 435 cd	
		TW		
<b>SCE</b>	solid clear with custom etched front (300x50mm)	WW	930 lm / 395 cd	
		WW2	980 lm / 415 cd	
		NW2	1030 lm / 435 cd	
		TW		
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
	<b>OC</b>			
Accessories	<b>PL.300</b>	monopoint plasterkit 300 mm		
	<b>OUT.FI</b>	interchangeable frosted ice diffuser		
	<b>OUT.MP</b>	interchangeable microprism diffuser		




°out with solid clear diffuser with custom etched front (SCE)



°out with solid frost diffuser (SF)

# °u-disk NEW


material aluminium coated / PMMA  
 weight 300gr / 0.66lb  
 voltage 24Vdc  
 cri >90  
 wattage 13W  
 dali supported DT6  
 rotation 355°  
 inclination 90°  
 certifications CE, RoHS  
 classifications IP20

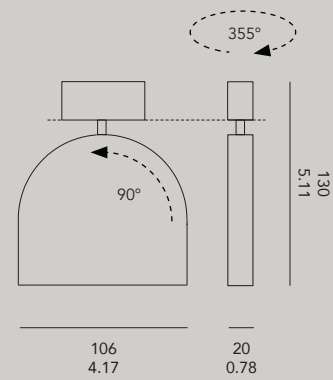


## UDISK.L.B.O.V.C

Led	<b>WW</b>	2700K   13W		
	<b>WW2</b>	3000K   13W		
	<b>NW2</b>	4000K   13W		
Body color	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Optics	<b>10</b>	optic 10°	WW	855 lm / 21400 cd
			WW2	940 lm / 23700 cd
			NW2	960 lm / 24750 cd
	<b>25</b>	optic 25°	WW	680 lm / 2580 cd
			WW2	720 lm / 2700 cd
			NW2	755 lm / 2835 cd
	<b>35</b>	optic 35°	WW	528 lm / 1540 cd
			WW2	690 lm / 1600 cd
			NW2	725 lm / 1680 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Control	<b>IC</b>	individually controlled fixture by DALI DT6		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.70</b>	monopoint plasterkit 70 mm		

# o-disk <sup>NEW</sup>

material aluminium coated / PMMA  
 weight 300gr / 0.66lb  
 voltage 24Vdc  
 cri >90  
 wattage 13W  
 dali supported DT6  
 rotation 355°  
 inclination 90°  
 certifications CE  
 classifications IP20 

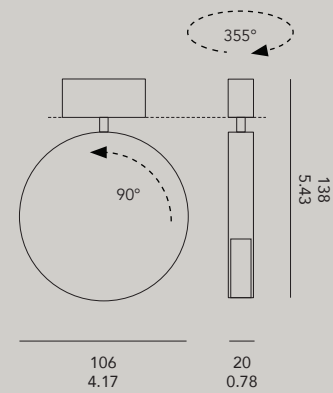


## ODISK.L.B.D.V.C

Led	<b>WW</b>	2700K   9,6W		
	<b>WW2</b>	3000K   9,6W		
	<b>NW2</b>	4000K   9,6W		
Body color	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser (wide beam)	<b>WW</b>	245 lm / 150 cd
			<b>WW2</b>	255 lm / 160 cd
			<b>NW2</b>	270 lm / 165 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Control	<b>IC</b>	individually controlled fixture by DALI DT6		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.70</b>	monopoint plasterkit 70 mm		

# °dot



material aluminium coated  
 weight 80gr / 0.17lb  
 voltage 24Vdc  
 cri >90  
 wattage 3,6W  
 dali not supported  
 rotation 4 steps of 90°  
 inclination 90°  
 certifications CE, ENEC  
 classifications IP20




## DOT.L.B.D.V

Led	<b>WW</b> <b>WW2</b> <b>NW2</b>	2700K   3,6W   100 lm - 2353 cd - 8° 3000K   3,6W   105 lm - 2670 cd - 8° 4000K   3,6W   110 lm - 2800 cd - 8°
Body color	<b>BK</b> <b>WH</b> <b>AL</b>	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)
Dimming	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer, on 2 circuits (see pag. 76)
Version	<b>T</b> <b>BI</b>	track mount built in monopoint (plasterkit required)
Accessories	<b>PL.DOT</b>	monopoint plasterkit °dot

# °dot turn <sup>NEW</sup>

material aluminium coated  
 weight 170gr / 0.37lb  
 voltage 24Vdc  
 cri >90  
 wattage 3W  
 dali supported DT6  
 rotation 355°  
 inclination 90°  
 certifications CE   
 classifications IP20 



## DOT.TURN.L.B.D.V

Led	<b>WW</b>	2700K   3,6W   100 lm - 2353 cd - 8°
	<b>WW2</b>	3000K   3,6W   105 lm - 2670 cd - 8°
	<b>NW2</b>	4000K   3,6W   110 lm - 2800 cd - 8°
Body color	<b>BK</b>	black matt ral 9011
	<b>WH</b>	white matt ral 9016
	<b>AL</b>	aluminium color ral 9006 (on request only)
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT6 track overall control. dimming possible with 0/1-10V, potentiometer, on 2 circuits (see pag. 76)
	<b>OC</b>	
Version	<b>T</b>	track mount
	<b>BI</b>	built in monopoint (plasterkit required)
Accessories	<b>PL.DOTTURN</b>	monopoint plasterkit °dot turn

# power supply 24Vdc

PS.24.XX.SM.HLG 1-10V dimming, CE, cUL certified, 90-305VAC

40	W	171*61.5*36.8 mm (L*W*H)
60	W	171*61.5*36.8 mm
80	W	195.6*61.5*38.8 mm
100	W	220*68*38.8 mm
150	W	228*68*38.8 mm
240	W	244.2*68*38.8 mm
320	W	252*90*43.8 mm
600	W	280*144*48.5mm

DAP04 dali adaptor for dali control of power supply HLG (165\*46\*23 mm)


PS.24.XX.SM.ELG 0-10V dimming, CE, cUL, CCC certified, 110-305VAC

at 240V	at 110V	
75W	60W	180*63*35.5mm (L*W*H)
100W	70W	199*63*35.5mm
150W	105W	219*63*35.5mm
200W	150W	244*71*37.5mm
240W	180W	244*71*37.5mm

PS.24.XX.SM.ELG.DA DALI dimming, CE, cUL, CCC certified, 110-305VAC

at 240V	at 110V	
75W	60W	180*63*35.5mm (L*W*H)
100W	70W	199*63*35.5mm
150W	105W	219*63*35.5mm
200W	150W	244*71*37.5mm
240W	180W	244*71*37.5mm

PS.24.SM.B.DIM Potentiometer dimming button (0-10V/1-10V)



LDIM.24V DIN rail mount dimmodule 24 VDC Max 240W controlled by 0/1-10V or potentiometer (width 25mm)

